

RE-THINK

YOUR CEILING

**NEW
& IMPROVED**

Achieve the perfect
blend of beauty and
acoustic performance.



Rigitone® Edge



Activ'Air® 8/18



Rigitone® Edge 8/18 has a regular pattern of 8 mm round perforations at 18 mm centres combining to provide Class C sound absorption. Used to create an effortless visual flow across the plane of the ceiling.

Acoustic

Practical absorption coefficient α_p

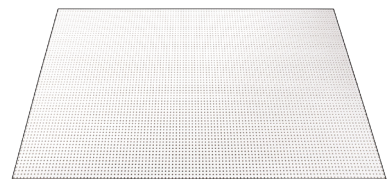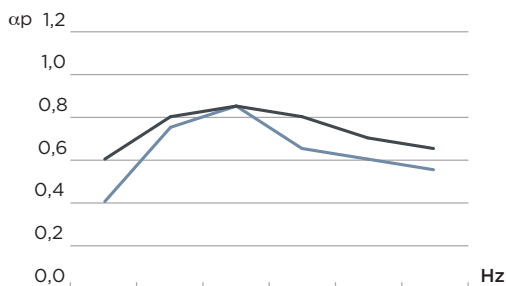

200 mm plenum / 60 mm wool
200 mm plenum / without wool

125	250	500	1000	2000	4000	α_w
0.60	0.80	0.85	0.80	0.70	0.65	0.75 (L)
0.40	0.75	0.85	0.65	0.60	0.55	0.65 (LM)

Acoustic Class	NRC (up to)	α_w value	Perforated Area
C	0.70	0.75	15.5%

Product Code	Acoustic tissue	Edge Type	Size (mm)	Thickness (mm)	Fire Resistance	Moisture Resistance	Weight (kg/m ²)
31670	Black	Chamfered	1188 x 1998	12.5	A2-s1, d0	Up to 70% RH	10

Contact Gyproc today!

Please visit our website for more product information.
www.gyproc.co.za