

**RE  
THINK  
YOUR CEILING**

**NEW  
& IMPROVED**

Achieve the perfect  
blend of beauty and  
acoustic performance.



# Rigitone® Edge



Activ'Air® 12-20/66



Rigitone® 12-20/66 has a regular diagonal pattern of 12 mm and 20 mm round perforations at 66 mm centres, with excellent acoustic absorption. It's a popular choice for large expansive interiors.

### Acoustic

Practical absorption coefficient  $\alpha_p$

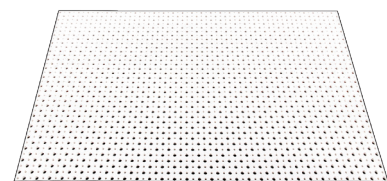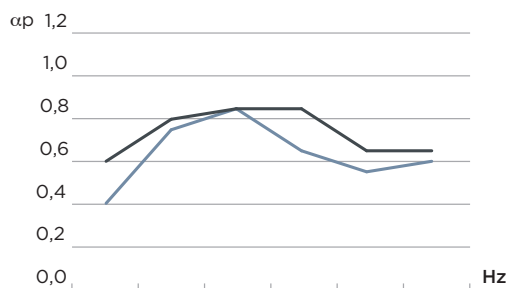

200 mm plenum / 60 mm wool  
200 mm plenum / without wool

125	250	500	1000	2000	4000	$\alpha_w$
0.60	0.80	0.85	0.85	0.65	0.65	0.75 (L)
0.40	0.75	0.85	0.65	0.55	0.60	0.65 (LM)

Acoustic Class	NRC (up to)	$\alpha_w$ value	Perforated Area
D	0.70	0.75	19.6%

Product Code	Acoustic tissue	Edge Type	Size (mm)	Thickness (mm)	Fire Resistance	Moisture Resistance	Weight (kg/m <sup>2</sup> )
31671	Black	Chamfered	1188 x 1980	12.5	A2-s1, d0	Up to 70% RH	9.5

**Contact Gyproc today!**

Please visit our website for more product information.  
[www.gyproc.co.za](http://www.gyproc.co.za)