

gyproc
SAINT-GOBAIN

Rigitone® Edge

**RE
THINK
YOUR CEILING**

**NEW
& IMPROVED**

Achieve the perfect
blend of beauty and
acoustic performance.

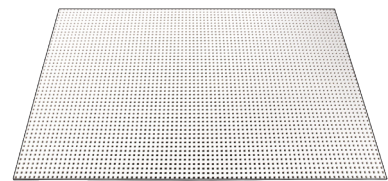
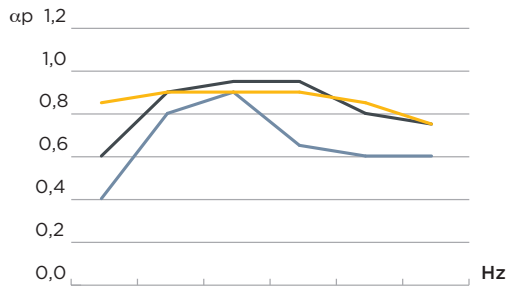

SAINT-GOBAIN



Rigitone® Edge 12/25 Q has a regular geometric pattern of 12 mm square perforations at 25 mm centres combining to provide Class B sound absorption. It is ideal for large, high ceilings.

Acoustic

Practical absorption coefficient α_p



200 mm plenum / 140 mm wool
200 mm plenum / 60 mm wool
200 mm plenum / without wool

125	250	500	1000	2000	4000	α_w
0.85	0.90	0.90	0.90	0.85	0.75	0.90
0.60	0.90	0.95	0.95	0.80	0.75	0.85 (L)
0.40	0.80	0.90	0.65	0.60	0.60	0.65 (L)

Acoustic Class	NRC (up to)	α_w value	Perforated Area
A	0.70	0.90	23%

Product Code	Acoustic tissue	Edge Type	Size (mm)	Thickness (mm)	Fire Resistance	Moisture Resistance	Weight (kg/m ²)
31672	Black	Chamfered	1200 x 2000	12.5	A2-s1, d0	Up to 70% RH	9.5

Contact Gyproc today!

Please visit our website for more product information.
www.gyproc.co.za